


Block of the month  
Due October 18, 2011  
Candy Corn Unfinished 7-1/2" x 7-1/2"  
Paper pieced

Questions contact  
Elaine Ericksen 708-895-1851- or  
Nikki Knowles 219-764-0199

Supplies needed:

Copy of candy corn paper pattern before you begin, if you would like to make more than one make copy. Better yet, make copies anyways I did make a few mistakes.

- Fabric 1- Orange Cut one 6" x 8"
- 2- Yellow Cut one 2-1/2" x 9"
- 3- White cut one 2-1/2" x 3-1/2"
- 4- Black cut one 3-1/2" x 6"
- 5- Black cut one 4" x 8"
- 6- Black cut one 4" x 8"
- 7- Black cut one 2-1/2" x 4"

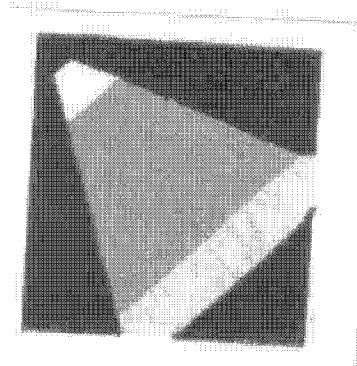

Assembly of block


(Sew in the numbered order on the pattern. Place fabric for "1" first then sew to "2" and so on)

Shorten your stitches on your machine.

1. On the backside of the pattern, pin the orange fabric to the pattern right side up, making sure the fabric is 1/2" overlap enough fabric. You are not sewing yet.
2. Place the yellow fabric on top of the orange, right side together making sure it is at least 1/2" over the line you will stitch.
3. Sew on the line where the orange and yellow come together. Start and stop at the pattern markings.
4. Fold back paper at line and trim fabric 1/4". Press yellow fabric down.
5. Place white fabric on top of the orange, right side together, and stitch on the white and orange line.
6. Fold the paper back and trim 1/4" Press back white fabric.
7. Place black 3 1/2" x 6" Piece on top of the yellow right sides together. Stitch on line. Fold back and trim 1/4" and press.
8. Place black 4"x8" on top of orange and yellow and white making sure black overlaps the lines.
9. Sew on line across. Fold back paper and trim 1/4" and press.
10. Place black 4x8 on the other side making sure the black overlaps the lines.
11. Sew on the line across. Fold back paper. Trim to 1/4" and press.
12. Place black 2 1/2"x 4" piece onto white on top and sew on the line. Fold back paper and trim to 1/4" and press. (Careful now pin the pieces down they can move underneath before you proceed to the next step).
13. Change stitch to a basting stitch and baste between the dotted and solid line all the way around the pattern. Trim all the way around on the dotted line. Remove paper from back and the block is complete.

NOTE: PATTERN MAY PRINT SLIGHTLY SMALLER THAN 7-1/2" 7-1/2" . IF YOUR PATTERN IS NOT THE CORRECT SIZE YOU MAY DRAFT A PATTERN ACCORDING TO THE ATTACHED DIAGRAM.

DRAW A 7" X 7" SQUARE. MARK DOTS ALONG SIDES OF SQUARE ACCORDING TO THE MEASUREMENTS SHOWN. CONNECT THE DOTS WITH LINES AS SHOWN IN DIAGRAM. ADD A 1/4 INCH SEAM ALLOWANCE ALL THE WAY AROUND. MUST MEASURE 7-1/2" X 7-1/2".

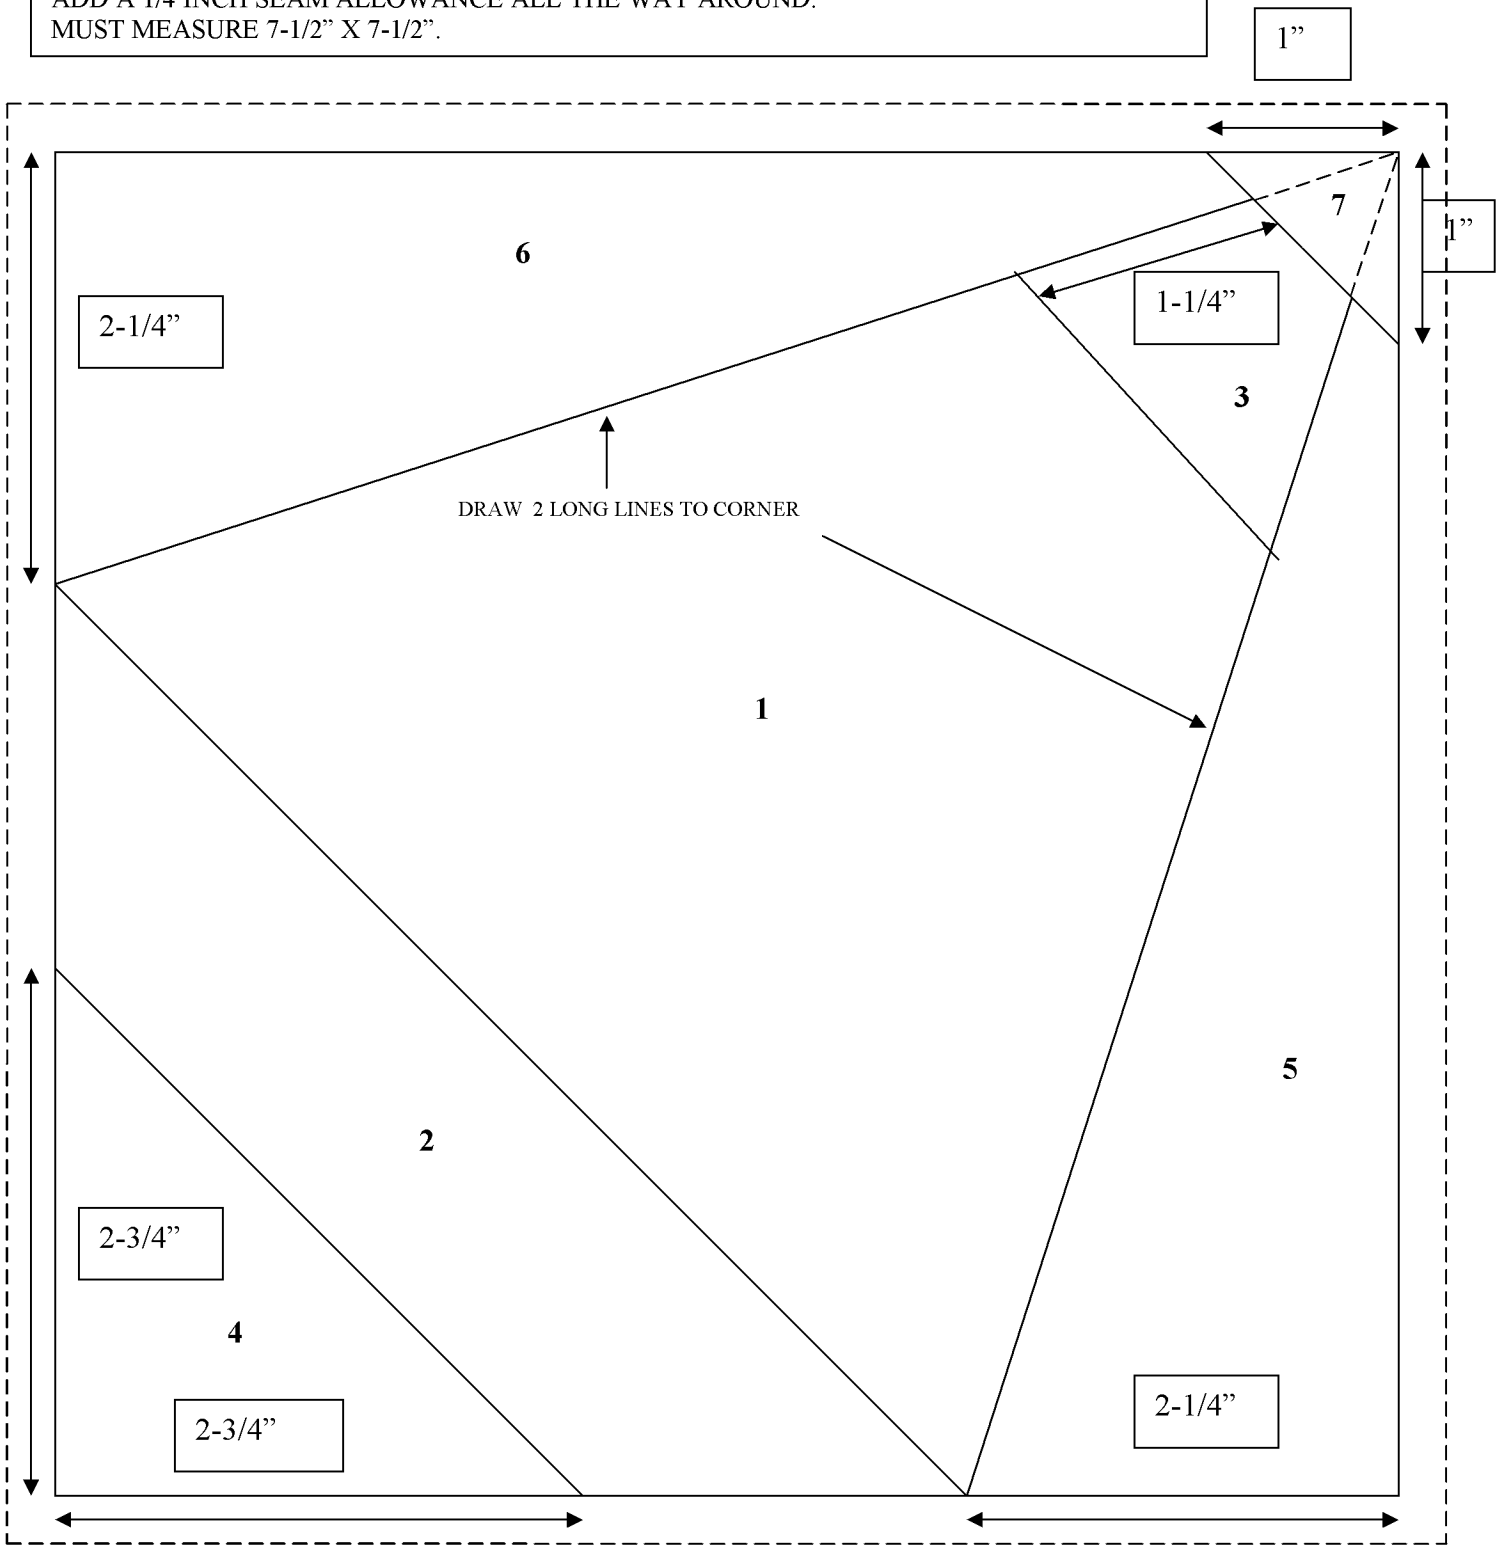

EXTEND FABRICS BEYOND DOTTED LINES, BASTE WITHIN SEAM ALLOWANCE THEN TRIM TO 7-1/2" X 7-1/2"

STOP! CHECK PATTERN SIZE. PATTERN SHOULD BE 7-1/2" X 7-1/2"  
BETWEEN THE DOTTED LINES

